



THOROUGHCLEAN

WATER BLASTERS

D24M-40C Skid
 D24M-50C Skid
 D24M-72C Skid
 Skid Diesel Water Pressure Cleaner

The ThoroughClean D24 skid diesel pressure cleaner range demands high pressure and/or flow in a rugged, tough and over-engineered machine that will outlast any other water blaster.



Thoroughclean Water Blasters
www.thoroughclean.com.au



Diesel Driven



Cold Water




High Usage

Distributed by:



08 9355 0355
 admin@jasman.com.au
 www.jasman.com.au
 U2, 10 Cohn St
 Carisle, WA 6101

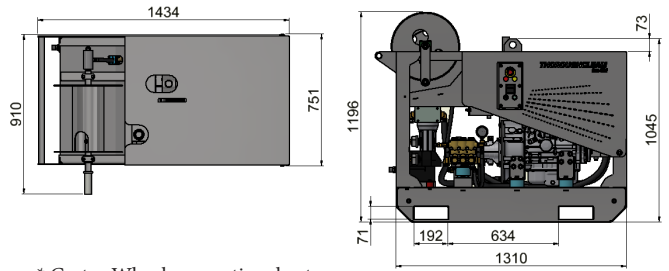

* Castor Wheels are optional extra

STANDARD EQUIPMENT



Product Code	p/n	D24M-40C	D24M-50C	D24M-72C
--------------	-----	----------	----------	----------

TECHNICAL DATA

Working Pressure	psi / bar	4000/275	5000/345	7200/496
Flow Rate	l/pm	18	21	17
Max Water Inlet Temp	°c / °f	63/154	63/154	63/154
Class (AS/NZS 4233.1:2013)	grade	A	B	B

INTENDED APPLICATION

Usage Frequency	hours	4 - 6	4 - 6	4 - 6
Category of Dirt / Debris	type	Heavy	Heavy	Heavy

MOTOR FEATURES

Engine	type	Yanmar	Yanmar	Yanmar
Power	hp	24	24	24
Fuel Supply	type	Diesel	Diesel	Diesel
Fuel Tank Capacity	litres	22	22	22
Low Oil Shutdown	y / n	Y	Y	Y
Starting System	type	Electric	Electric	Electric

OPTIONAL ACCESSORIES

Extra + mt hose
Industrial Castor wheels with brakes
330 mm Stainless Steel Lance - Class A only
1500 mm Stainless Steel Lance
Detergent nozzle

FEATURES

Drive Type	type	Gear Box	Gear box	Gear box
Pump	make	Hawk	Hawk	Hawk
Pump Speed	rpm	1450	1450	1450
Rating	Hz	N/a	N/a	N/a
By-Pass Valve	model	VB80/280	VB60/600	VB60/600
Orifice / Nozzle	size	15040	15045	15045

OTHER FEATURES

Adjustable Pressure	y / n	Y	Y	Y
Hose Reel Provision	y / n	Y	Y	Y
Frame Structure	type	Galvanised	Galvanised	Galvanised
Wheels	y / n	Optional	Optional	Optional
Themoshield	63o	Y	Y	Y


DIMENSIONS & WEIGHT

Approx Weight	kg	500	500	500
Unit Dimensions - L x W x H	cm	143x76x120	142x76x120	143x76x120

WARRANTY(S)

Motor Warranty	year(s)	3	3	3
Pump Warranty	year(s)	1	1	1
Chasis Warranty	year(s)	1	1	1

**Derating (or de-rating or de-tuning) is the operation of a machine at less than its rated maximum power in order to prolong its life. The term is commonly applied to [electrical](#) and [electronic devices](#) and to [internal combustion engines](#)

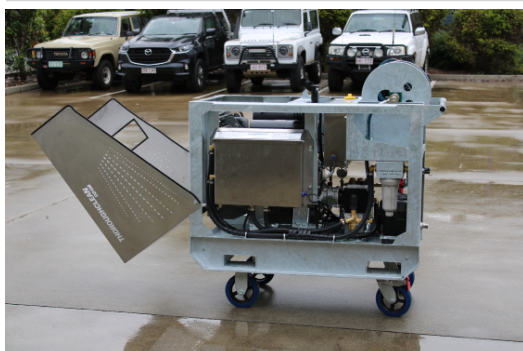

ANALYSIS - DESIGN
 CONSTRUCTION - ACCESSORIES

DISCLAIMER: All images are a representation only and are not to scale. Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, due to ongoing product development and improvements, products may vary from this data sheet. The user of the information agrees that the information is subject to change without notice.